




FICHA TÉCNICA

CABO ASU CFOA-SM-ASU-S NR

ADSS(0+3)

CFOA-SM-ASU-S NR

1. Cable cross-section (not to scale and only for reference)

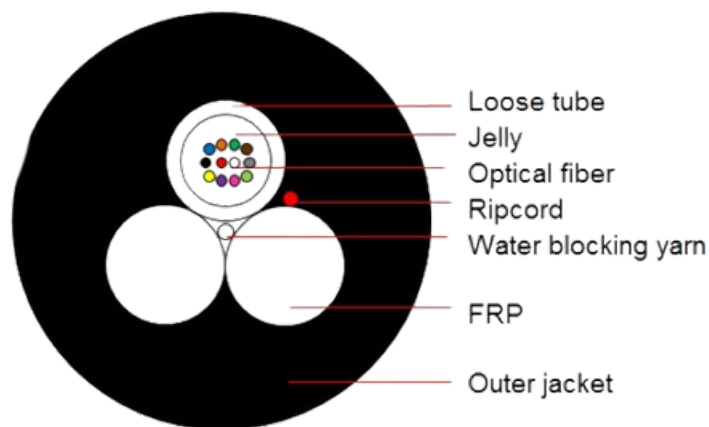

2. Cable description

Single loose tube construction, jelly compound filled, water blocking yarns, a ripcord and then PE outer sheath with two non-metallic strength members combined.

3. Fiber & tube color

Fiber color code starts from No.1 Green:

No.	1	2	3	4	5	6
Color	Green	Yellow	White	Blue	Red	Purple
No.	7	8	9	10	11	12
Color	Brown	Pink	Black	Gray	Orange	Aqua

Loose tubes color code.

No.	1
Color	Natural

4. Structure parameter

Span 80m

Item	Contents	Unit	Value
Fiber count	Number	/	6~12
Loose tube	Number	/	1
Cable diameter	±0.5	mm	6.0
Cable weight	±10%	kg/km	32
Max. span	/	m	80

Document Type	Spec. No.
Tech. Specification	32025020611

Approved by	Prepared by	Date	Rev	Page
Roy	Tangzc	2025-2-6	1.0	1 / 3

Item	Contents	Unit	Value
Fiber count	Number	/	6~12
Loose tube	Number	/	1
Cable diameter	±0.5	mm	7.0
Cable weight	±10%	kg/km	44
Max. span	/	m	120

Note: sizes and values without tolerances are nominal values.

It's advised to notch the cable before splitting the sheath for better ripping.

5. Mechanical & Environmental Performance

Item	Contents	Value
Max. tensile load	Short term	1.5G for span 80m 2G for span 120m
Max. crush resistance	Short term	1G but min. 1000 N/100mm and max. 2200 N/100mm
Min. bending radius	Installation	20 x cable diameter
	Operation	10 x cable diameter
Temperature range	Operation	-20°C ~ +65°C
	Installation	0°C ~ +60°C
	Storage/transportation	-20°C ~ +65°C

Note: G is the weight of the cable per km.

6. Main mechanical & environmental performance test

Item	Test Method	Acceptance Condition
Thermal Cycle NBR 13510	- Temperature: -20°C ~ +65°C - Time of each step: 48h - Times: 4	- Loss change ≤ 0.1dB@1310±20nm. - Loss change ≤ 0.1dB@1550±20nm.
Tensile Strength NBR 13512	- Load: short term tension - Length of cable: 25m×6	- Loss change ≤ 0.1dB@1310±20nm - Loss change ≤ 0.1dB@1550±20nm - Fiber strain ≤ 0.05%.
Crush Test NBR 13507	- Load: short term crush - Load increase rate: 5mm/min - Load time: 2min	- Loss change ≤ 0.1dB@1310±20nm. - Loss change ≤ 0.1dB@1550±20nm. - No sheath damage.
Torsion NBR 13513	- Length: 0.2m - Angle: ±90° - Times: 10	- Loss change ≤ 0.1dB@1310±20nm. - Loss change ≤ 0.1dB@1550±20nm. - No sheath damage.
Curvature NBR 13508	- Curve radius: 12 x OD - Circle: 5	- Loss change ≤ 0.1dB@1310±20nm. - Loss change ≤ 0.1dB@1550±20nm. - No sheath damage.

Document Type	Spec. No.
Tech. Specification	32025020611

Approved by	Prepared by	Date	Rev	Page
Roy	Tangzc	2025-2-6	1.0	2 / 3

Item	Test Method	Acceptance Condition
Bending NBR 13518	- Curve radius: 12 x OD - Times: 25 - Load: 2kg - Angle: $\pm 90^\circ$	- Loss change $\leq 0.1\text{dB}@1310\pm 20\text{nm}$. - Loss change $\leq 0.1\text{dB}@1550\pm 20\text{nm}$.
Impact NBR 13509	- Height: 0.15m - Times: 25 - Weight: according to the standard	- No fiber break and no sheath damage.
Filling Component Leakage NBR 9149	- Length: 300mm - Sample: 3 - Temperature: $65\pm 2^\circ\text{C}$ - Time: 24h	- No outflow or dripping.
Alternated Flexion NBR 13514	- Mandrel: 570mm - Times: 50	- Loss change $\leq 0.1\text{dB}@1310\pm 20\text{nm}$. - Loss change $\leq 0.1\text{dB}@1550\pm 20\text{nm}$.

7. OPTICAL FIBER

Item	Contents	Value
G.652D Optical characteristics		
Attenuation	@1310nm	$\leq 0.36\text{dB/km}$
	@1550nm	$\leq 0.22\text{dB/km}$
Dispersion	@1288nm ~ 1339nm	$\leq 3.5\text{ps}/(\text{nm}\cdot\text{km})$
	@1550nm	$\leq 18\text{ps}/(\text{nm}\cdot\text{km})$
Zero-Dispersion wavelength		1300nm ~ 1324nm
Zero-Dispersion slope		$\leq 0.092\text{ps}/(\text{nm}^2\cdot\text{km})$
Mode field diameter (MFD)	@1310nm	$9.2\pm 0.4\mu\text{m}$
	@1550nm	$10.4\pm 0.5\mu\text{m}$
Cable cutoff wavelength $\lambda_{cc}(\text{nm})$		$\leq 1260\text{nm}$
Macro bending attenuation	@1550nm (100turns; $\Phi 60\text{mm}$)	$\leq 0.05\text{dB}$
Link polarization dispersion (PMD_0)		$\leq 0.1\text{ps}/\text{km}^{1/2}$

Document Type	Spec. No.
Tech. Specification	32025020611

Approved by	Prepared by	Date	Rev	Page
Roy	Tangzc	2025-2-6	1.0	3 / 3